

 **MENNEKES®**

Plugs for the world

Event and entertainment technology.



Plugs and  
receptacles  
for stage, TV,  
radio and  
open air events.

For safe live events.

# Full range for



## The essential advantages at a glance:

- High mechanical toughness
- EverGUM enclosures made from solid black rubber
- Weatherproof and resistant against ageing
- High dimensional stability and accuracy
- High dielectric strength and creep resistance
- Good resistance against acids and chemicals

**EverGUM** enclosures for wall mounting. Generous wiring space due to lifted DIN rails. No tensile load on the wiring when enclosure is opened. Circuits marked on a inscribable label.



Secure wall fixing inside and outside.

**EverGUM** receptacle strips for suspension, wall mounting or portable as the ideal companion.



**EverGUM** mobile distribution unit with closed bottom parts and a ground clearance of 77 mm, prevents ingress of water. Hinged cover with stainless steel quick release clips.



# stages.



Power-pack for mobile and stationary use.

**MENNEKES** have a complete range of components to suit your needs for every location. Please choose from a broad assortment

of panel receptacles and plugs.

**RAPIDO® Panel receptacles.**

Time savers with central thread without flange screws.

**EverGUM distributors units** are available completely assembled and therefore immediately ready for use.



To fit what has to be a good match.

# Safe. Strong.

Fit for  
showbiz  
at best.



## PowerTOP® Xtra

Plugs and connectors are designed for permanent use under tough conditions. PowerTOP® Xtra 63A and 125A are available in IP 67 protection with high heat

resistant contact carriers, nickel plated contacts, glands and external strain reliefs.

## AM-TOP®

Plugs and connectors with single part enclosure in 16A and 32A are available in IP 44 protection. With high heat resistant contact carriers, nickel plated

contacts, and cable glands with sealing.



# Durable.




**PowerTOP.**  
Ultimate safety at highest strain.

Our products are exposed to most extreme conditions in the MENNEKES test lab. Only those products which stand up to this harsh test will be used worldwide and deserve to be labelled with

our name. Constant exposure to cold, heat, dust and water is carried out in our test lab over and over again. After that, products are certified by recognised organisations

according to international standards. You can rely on this, any time, in any circumstances, all over the world.

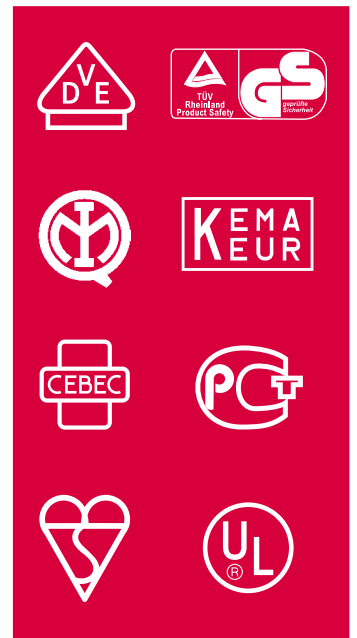

# MENNEKES CEE panel mounted receptacles

Enclosure and insert made of **AMAPLAST®**.

All visible plastic parts in black colour, labels - if not engraved - in grey colour.

Other voltages and frequencies available on request.



**Panel mounted receptacle**  
straight,  
flange: 55 x 55 mm  
fixing hole spacing: 45 x 45 mm

▲ IP 44  
Product group 1055



**Panel mounted receptacle**  
straight,  
flange: 72 x 65 mm  
fixing hole spacing: 52 x 52 mm

▲ IP 44  
Product group 1055



**Panel mounted receptacle**  
straight,  
flange: 75 x 75 mm,  
fixing hole spacing: 60 x 60 mm

**Contacts nickel-plated**

▲ IP 44  
Product group 1056  
Type 1385ZI shown



**Panel mounted receptacle with**  
**SoftCONTACT**  
straight

▲ IP 44  
Product group 1056  
Type 1252AC shown



**Panel mounted receptacle**  
**RAPIDO with TwinCONTACT**  
screwless spring terminals,  
suitable for through wiring,  
for wall apertures 61 mm  
diameter, central fixing  
without flange screws

▲ IP 44  
Product group 1154



**Panel mounted receptacle**  
**RAPIDO**  
screwless spring terminals,  
suitable for through wiring,  
for wall apertures 70 mm  
diameter, central fixing  
without flange screws

▲ IP 44  
Product group 1157

Ampere	Poles	Part numbers		
		110 V	230 V	400 V
16	3		1629ZC	
16	4			1387ZA
16	5			1385ZI
32	3		1395ZD	
32	5			22071ZA
63	3		1261AE	
63	5			1252AC
16	3		997AB	
32	3		995AB	

# MENNEKES CEE plugs, inlets and connectors

Enclosure and insert made of **AMAPLAST®**.

All visible plastic parts in black colour, labels - if not engraved - in grey colour.

Other voltages and frequencies available on request.



## Plug AM-TOP®

single part body, with highly heat resistant contact carrier, nickel-plated contacts, cable gland and sealing

▲ IP 44  
Product group 2141  
Type 21421ZA shown



## Plug PowerTOP® Xtra

with highly heat resistant contact carrier, frame terminals and nickel-plated contacts, gland and external cable grip

◆ IP 67  
Product group 2016  
Type 13260 shown



## Inlet

a retaining nose to hold the hinged lid of the connector must be provided by the customer in order to ensure satisfactory locking

**Contacts nickel-plated**

▲ IP 44  
Product group 2096  
Type 853SW shown



## Connector AM-TOP®

single part body, with highly heat resistant contact carrier and nickel-plated contacts, cable gland and sealing

▲ IP 44  
Product group 3141  
Type 21422ZB shown



## Connector PowerTOP® Xtra

**63A SoftCONTACT**  
**125A TorsionSpringCONTACT**  
with highly heat resistant contact carrier, frame terminals, gland and external cable grip

◆ IP 67  
Product group 3016  
Type 14260 shown

Ampere	Poles	Part numbers		
		110 V	230 V	400 V
16	3	22737ZA	22302ZC	
16	4			22289ZC
16	5			21421ZA
32	3		260ZD	
32	5			21428ZA
63	5			13260
125	5			13261
16	5			853SW
32	5			24152ZA
16	3	509ZC	21877ZC	
16	4			21021ZB
16	5			21422ZB
32	3		522ZB	
32	5			21039ZB
63	5			14260
125	5			14261

## Notice:

The black colour of the MENNEKES products for the entertainment sector is not a colour code.

The nominal voltage is shown on the label and the colour of the product or enclosure is not an indication of the voltage of the components!

# MENNEKES SCHUKO® and grounding type panel mounted receptacles

Enclosure made of **AMAPLAST®**, to DIN 49440-1, 2p+E, 230V

All visible plastic parts in black colour, labels - if not engraved - in grey colour.



**SCHUKO® panel mounted receptacle**  
**German standard,**  
 with hinged lid, without shutter,  
 3 plug-in terminals or 3 screw terminals,  
 as connecting terminals for 1.5 – 2.5 mm<sup>2</sup>

▲ IP 54  
 Product group 1936/1930  
 Type 11012 shown



**Grounding-type panel mounted receptacle**  
**French/Belgian standard,**  
 with hinged lid, with shutter,  
 3 plug-in terminals,  
 as connecting terminals for 1.5 – 2.5 mm<sup>2</sup>

▲ IP 44  
 Product group 1930  
 Type 11162 shown  
 You can combine it with a base for wall mounted receptacles (see last position).



**SCHUKO® panel mounted receptacle**  
**German standard,**  
 without hinged lid, without shutter,  
 3 plug-in terminals or 3 screw terminals,  
 as connecting terminals for 1.5 – 2.5 mm<sup>2</sup>

IP 20  
 Product group 1938/1937  
 Typ 11512 shown



**SCHUKO® panel mounted receptacle**  
**German standard,**  
 with hinged lid, also suitable for cable ducts and flush mounted installation boxes

▲ IP 44  
 Product group 1928  
 Type 10809 shown

**Connecting protective caps**  
 for fastening to panel mounted receptacle 10809



**SCHUKO® receptacle**  
**German standard,**  
 with hinged lid, with 3 plug-in terminals for connection of 1.5 – 2.5 mm<sup>2</sup>,  
 threaded cable entry M 20 x 1.5 at top and blind entry (for cut out) M 20 x 1.5 at bottom,  
 can be arranged in a row using slot and slide

▲ IP 44  
 Product group 1935



**Base for wall mounted receptacles,**  
 with cable entry and screws

▲ IP 44  
 Product group 8313

Ampere	V	Part numbers	
		plug-in terminals	screw terminals
16	230	11012	11032
16	230	11162	
16	230	11512	11532
16	230		10809
		19030706	
16	230	10083	
		10716	



# MENNEKES grounding type panel mounted receptacles, SCHUKO® plugs and connectors, receptacle strips

Enclosure made of **AMAPLAST®**, to DIN 49440-2 / 49440-3 and DIN VDE 0620, 2p+E, 230V.  
All visible plastic parts in black colour, labels - if not engraved - in grey colour.



## Grounding-type panel mounted receptacle British standard,

with shutter and matching frame,  
with hinged lid and seal,  
with screw terminals

⚠ IP 44  
Product group 1943



## SCHUKO® plug to German and French/Belgian standard

with grommet, for cables up to 3 x 2.5 mm<sup>2</sup>,  
up to H07RN-F

⚠ IP 44  
Product group 2927



## SCHUKO® connector

with grommet and lid,  
for cables up to 3 x 2.5 mm<sup>2</sup>, up to H07RN-FF

⚠ IP 44  
Product group 3927



## SCHUKO® connector

with grommet,  
for cables up to 3 x 2.5 mm<sup>2</sup>, up to H07RN-F

Product group 3927



## Receptacle strip

pre-wired for installation, with cable grip, with hanging clip  
Fitted with: 3 SCHUKO® receptacles 16A, 230V, with terminal  
Cable entry:  
1 x M20 plugged at the top  
1 x M20 with gland at the bottom  
with 1m of feeder cable H07RN-F3G1.5 with SCHUKO® plug

⚠ IP 44  
Product group 8002



## Receptacle strip

pre-wired for installation, with cable grip, with hanging clip  
Fitted with: 3 SCHUKO® receptacles 16A, 230V, with terminal  
Cable entry:  
1 x M20 plugged at the top  
1 x M20 with gland at the bottom  
without feeder cable

⚠ IP 44  
Product group 8002

Ampere	V	Part number
13	230	10713
16	230	10754
16	230	10755
16	230	10756
16	230	9200048
16	230	9203230

# MENNEKES solid rubber enclosures made of EverGUM

Protection type ▲ IP 44

All visible plastic parts in black colour, labels - if not engraved - in grey colour.

	<p><b>Wall mounted enclosure EverGUM,</b> with hinged cover, without holes</p> <p>▲ IP 44</p>	<p><b>Fitted with</b></p> <p>with N+PE terminal with hinged window and DIN-rail for 12 modules</p>	<p><b>Part number</b></p> <p><b>70091</b></p>
	<p><b>Wall mounted enclosure EverGUM,</b> with hinged cover, without holes</p> <p>▲ IP 44</p>	<p>with N+PE terminal with hinged window and DIN-rail for 16 modules</p>	<p><b>70090</b></p>
	<p><b>Wall mounted enclosure EverGUM,</b> with hinged cover, without holes</p> <p>▲ IP 44</p>	<p>with N+PE terminal</p>	<p><b>7301977</b></p>
	<p><b>Receptacle strip EverGUM with handle for hanging, for wall mounting, portable</b> without holes</p> <p>▲ IP 44 Type 70093 shown</p>	<p>with N+PE terminal</p>	<p><b>70093</b></p>
	<p><b>Enclosure EverGUM compact solid rubber distributor, portable, stackable,</b> with hinged cover, with stainless steel quick release, without holes</p> <p>▲ IP 44</p>	<p>DIN-rail for 12 modules, with N+PE terminal</p>	<p><b>70385SW</b></p>
	<p><b>Enclosure EverGUM maxi solid rubber distributor, portable, stackable,</b> with hinged cover, with two stainless steel quick release, without holes</p> <p>▲ IP 44</p>	<p>with N+PE terminal</p>	<p><b>70092</b></p>

# MENNEKES solid rubber receptacle combinations made of EverGUM and hinged windows

Protection type ▲ IP 44

All visible plastic parts in black colour, labels - if not engraved - in grey colour.

		Fitted with	Part number
	<p><b>Receptacle strip EverGUM with handle for hanging, for wall mounting, portable</b></p> <p>▲ IP 44 Type 7106783 shown</p> <p>As above, but with grounding type receptacles British standard (13A, 230V)</p>	<p>1 CEE receptacle 16A, 5p, 400V 1 CEE receptacle 16A, 3p, 230V 2 SCHUKO® receptacles 16A, 2p+E, 230V</p> <p>Connection: terminal for 1 cable up to 5 x 10 mm<sup>2</sup></p>	<p><b>7106889</b></p> <hr/> <p><b>7106783</b></p>
	<p><b>Receptacle combinations EverGUM solid rubber compact portable, stackable, with hinged cover, with stainless steel quick release</b></p> <p>▲ IP 44 Type 7408884 shown</p> <p>As above, but with grounding type receptacles British standard (13A, 230V)</p>	<p>1 CEE receptacle 32A, 5p, 400V 1 CEE receptacle 16A, 5p, 230V 1 MCB 16A, 3p, C 4 SCHUKO® receptacles 16A, 2p+E, 230V 4 MCB's 16A, 1p, C</p> <p>Feeder cable: 2 m H07RN-F5G4 and 1 CEE plug 32A, 5p, 400V</p>	<p><b>7408884</b></p> <hr/> <p><b>7408884GB</b></p>
	<p><b>Receptacle combinations EverGUM solid rubber maxi portable, stackable, with hinged cover, with two stainless steel quick release</b></p> <p>▲ IP 44 Type 7513001 shown</p> <p>As above, but with grounding type receptacles British standard (13A, 230V)</p>	<p>1 CEE receptacle 63A, 5p, 400V 1 CEE receptacle 32A, 5p, 400V 1 MCB 32A, 3p, C 1 CEE receptacle 16A, 5p, 230V 1 MCB 16A, 3p, C 4 SCHUKO® receptacles 16A, 2p+E, 230V 2 MCB's 16A, 1p, C 1 RCD  63A, 4p, I<sub>ΔN</sub> = 0.03A</p> <p>Feeder cable: 2 m H07RN-F5G10 and 1 CEE plug 63A, 5p, 400V</p>	<p><b>7513001</b></p> <hr/> <p><b>7513001GB</b></p>
	<p><b>Hinged window without protective cover, with knurled screws</b></p> <p>◆◆ IP 67</p>	<p>6 modules Window colour: smoked glass</p>	<p><b>40985ZB</b></p>
	<p><b>Hinged window without protective cover, with knurled screws</b></p> <p>◆◆ IP 67</p>	<p>8 modules Window colour: smoked glass</p>	<p><b>40978ZA</b></p>
	<p><b>Hinged window without protective cover, with knurled screws</b></p> <p>◆◆ IP 67</p>	<p>12 modules Window colour: smoked glass</p>	<p><b>40980ZC</b></p>



## International branches / representations

**CN China**

NANJING MENNEKES Electric Appliances Co., Ltd.  
58 Qinhuai Road  
Jiangning Development Zone  
PRC-211100 Nanjing  
PR China  
Tel. + 86 (0) 25 / 52 12 55 66  
Fax + 86 (0) 25 / 52 12 55 77  
E-Mail info@MENNEKES.com.cn  
Internet www.MENNEKES.com.cn

**F France**

MENNEKES  
Electrotechnique France SARL  
Z.I. de Leveau – Porte F  
F-38200 – VIENNE  
Tel. + 33 (0) 4 / 37 02 24 10  
Fax + 33 (0) 4 / 74 53 41 39  
E-Mail mef@MENNEKES.fr  
Internet www.MENNEKES.de

**UK Great Britain**

MENNEKES Electric Ltd.  
Unit 4, Crayfields Industrial Park  
Main Road, St. Pauls Cray  
Orpington  
Kent BR5 3HP, UK  
Tel. + 44 (0) 16 89 / 83 35 22  
Fax + 44 (0) 16 89 / 83 33 78  
E-Mail sales@MENNEKES.co.uk  
Internet www.MENNEKES.co.uk

**I Italy**

MENNEKES Electric Italia s. r. l.  
Piazza Garibaldi 1  
I-21021 Angera (VA)  
Tel. + 39 03 31 / 210 827  
Fax + 39 03 31 / 932 133  
E-Mail info@MENNEKES.it  
Internet www.MENNEKES.it

**RI Indonesia**

MENNEKES  
Elektrotechnik GmbH & Co. KG  
(Indonesia Representative Office)  
Graha Mustika Ratu 10th Floor  
JL. Jend. Gatot Soebroto Kav.74-75  
Jakarta 12870  
Indonesia  
Tel. + 62 (0) 21 / 83 52 - 0 80/0 81  
Fax + 62 (0) 21 / 83 52 - 0 82  
E-Mail sales@MENNEKES.de

**IND India**

MENNEKES  
Elektrotechnik GmbH & Co. KG  
(India Representative Office)  
No. 2 A, Gowthami Towers  
Cenotaph Road, 1 St. Street  
600018 Teynampet, Chennai  
India  
Tel. + 91 (0) 44 243 158 - 50  
Fax + 91 (0) 44 243 158 - 53  
E-Mail chennai@MENNEKES.de

**SGP Singapore**

MENNEKES  
Electric Singapore Pte. Ltd.  
No. 3 International Business Park  
# 03-28 Nordic European Centre  
SGP-Singapore 609927  
Tel. + 65 / 65 67 59 78  
Fax + 65 / 65 63 24 71  
E-Mail info@MENNEKES.com.sg

**THA Thailand**

MENNEKES  
Elektrotechnik GmbH & Co. KG  
(Thailand Representative Office)  
26/4 Sukhumvit 64 Rd.  
Bangchack Prakanong  
Bangkok 10260  
Tel. + 66 (0) 2 / 741 5266  
Fax + 66 (0) 2 / 741 5267  
E-Mail suphamit@MENNEKES.de

**USA United States of America**

MENNEKES Electrical Products  
277, Fairfield Road  
USA-Fairfield, N.J. 07004  
Tel. + 1 973 / 882-83 33  
Fax + 1 973 / 882-55 85  
E-Mail info@MENNEKES.com  
Internet www.MENNEKES.com

**MENNEKES**

Elektrotechnik GmbH & Co. KG  
Industrial plugs and sockets

P. O. Box 13 64  
D-57343 Lennestadt  
Tel. + 49 (0) 27 23 / 41-1  
Fax + 49 (0) 27 23 / 41-2 14  
info@MENNEKES.de  
www.MENNEKES.de

Visitor address:  
Aloys-Mennekes-Straße 1  
D-57399 Kirchhundem / Germany

**Plant Neudorf**

Technoplast GmbH  
Karlsbader Straße 50a  
D-09465 Neudorf/Erzgebirge  
Tel. + 49 (0) 3 73 42 / 8 62-0  
Fax + 49 (0) 3 73 42 / 8 62-38  
info@tp-neudorf.de